



Thread Restorer N7230 ®

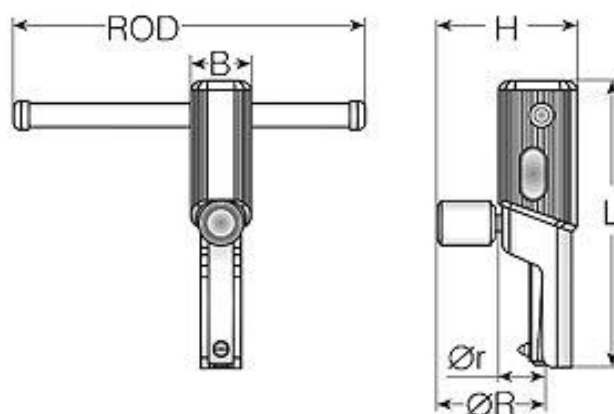

No calibration required. Self-adjusting to any pitch and size within range. Automatically chases good thread sections to repair the damaged parts. Hardened cutting blades (HSS). Removes rust and burrs. Yellow nylon pads are extra available. Tool is essential when repairing threads in soft metal.

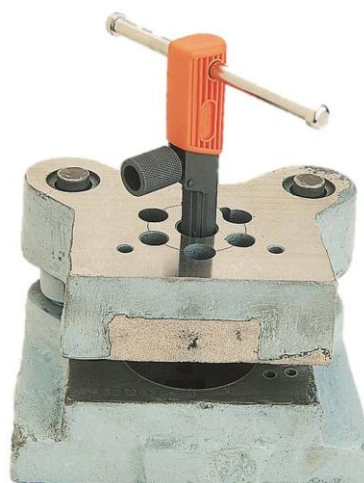

	Ø D Range	Pipes	L	B	H	ROD	ØR	ØR	Package Size	Weight
									W H	Lb gm
Inch	$1\frac{1}{16}$ - $1\frac{3}{16}$	$\frac{3}{8}$ - $\frac{1}{2}$	$4\frac{3}{8}$	$\frac{13}{16}$	$2\frac{1}{16}$	$5\frac{1}{8}$	$\frac{13}{16}$	$1\frac{3}{4}$	$4\frac{1}{2}$ $7\frac{3}{8}$	0.55 250
mm	16-20		111	21	53	130	20	45	115 187	

Cat. No	Part Name	Part No.	Size	Description
07230	RK 23 60°	07236	16 - 20 mm	Fitted as standard
	RK 23 55°	07235		Comply to British standard threads
	N7210 Nylon Pad	07237	11/16" - 13/16"	