



Thread Restorer N7240 ®

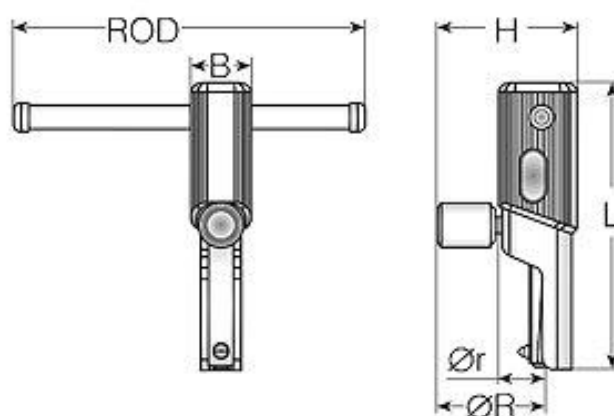

No calibration required. Self-adjusting to any pitch and size within range. Automatically chases good thread sections to repair the damaged parts. Hardened cutting blades (HSS). Removes rust and burrs. Yellow nylon pads are extra available. Tool is essential when repairing threads in soft metal.

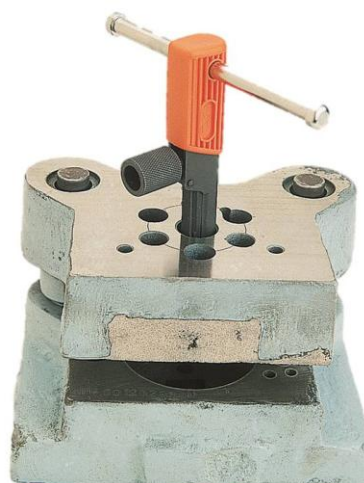

Ø D Range	Pipes	L	B	H	ROD	ØR	ØR	Package Size	Weight
								W H	Lb gm
Inch	$\frac{7}{8}-1\frac{1}{4}$	$\frac{1}{2}-\frac{7}{8}$	$5\frac{3}{8}$	$1\frac{1}{16}$	$2\frac{1}{2}$	$6\frac{3}{8}$	$1\frac{1}{16}$	$2\frac{1}{8}$	5 8 $\frac{5}{16}$
mm	22-32		136	27	64	161	27	54	127 211
									1.00 450

Cat. No	Part Name	Part No.	Size	Description
07240	RK 24 60°	07246	22 - 32 mm	Fitted as standard
	RK 24 55°	07245		Comply to British standard threads
	N7210 Nylon Pad	07247	7/8" - 1 1/4"	