


Thread Restorer N7250 ®



No calibration required. Self-adjusting to any pitch and size within range. Automatically chases good thread sections to repair the damaged parts. Hardened cutting blades (HSS). Removes rust and burrs.

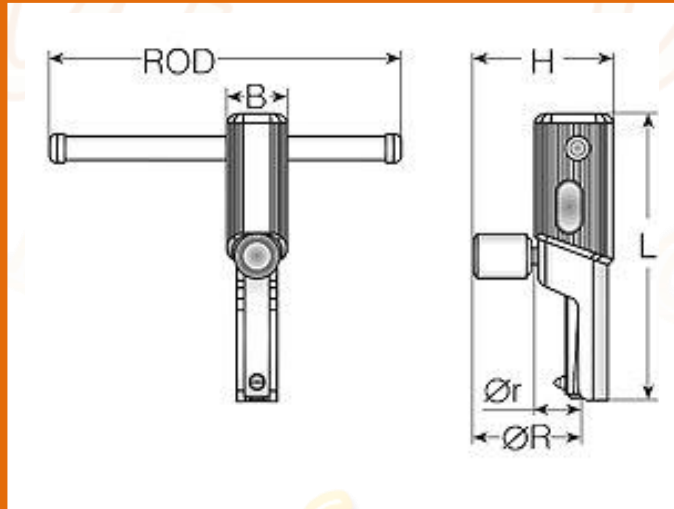

	Ø D Range	Pipes	L	B	H	ROD	ØR	ØR	Package Size			Weight	
									L	W	H	Lb	gm
Inch	1 1/4" - 2 1/8"	7/8" - 1 3/4"	6 7/16"	1 1/2"	3 3/16"	7 9/16"	1 3/8"	2 7/16"	8 3/16"	3 3/8"	1 5/8"	2,1	950
mm	32-54		163	38	81	192	35	62	208	85	42		

Cat. No	Part Name	Part No.	Size	Description
07250	RK 25 60°	07256C	32 - 54 mm 1 1/4" - 2 1/8"	Fitted as standard
	RK 25 60°	07258F		For threads finer than 14 TPI or 1.75mm
	RK 25 55°	07255C		Comply to British standard threads
	RK 25 55°	07252F		for threads finer than 14 TPI or 1.75mm
	N7250 Sleeve	07259		Between 44 - 54mm (1 3/4" - 2 1/8")

Thread Restorer Product Line ®