


Thread Restorer N7260 ®



No calibration required. Self-adjusting to any pitch and size within range. Automatically chases good thread sections to repair the damaged parts. Hardened cutting blades (HSS). Removes rust and burrs.

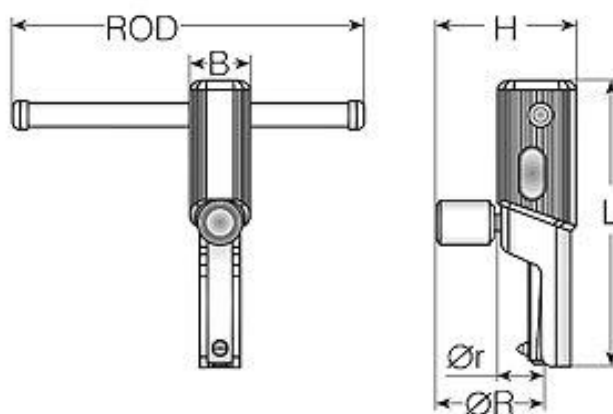

| | Ø D Range | Pipes | L | B | H | ROD | ØR | ØR | Package Size | | | Weight | |
|------|-----------------|---------------|---------|----------|--------|---------|--------|--------|--------------|--------|--------|--------|------|
| | | | | | | | | | L | W | H | Lb | gm |
| Inch | 1 1/4" - 2 5/8" | 7/8" - 2 1/4" | 6 7/16" | 1 15/16" | 3 5/8" | 7 9/16" | 1 5/8" | 2 3/4" | 8 3/16" | 3 3/8" | 1 5/8" | 2,4 | 1100 |
| mm | 32-68 | | 163 | 50 | 92 | 192 | 41 | 70 | 208 | 85 | 42 | | |

| Cat. No | Part Name | Part No. | Size | Description |
|---------|--------------|----------|-------------------------------|---|
| 07260 | RK 25 60° | 07256C | 32 - 68 mm 1 1/4" - 2 5/8" | Fitted as standard |
| 07260 | RK 25 60° | 07258F | | For threads finer than 14 TPI or 1.75mm |
| 07260 | RK 25 55° | 07255C | | Comply to British standard threads |
| 07260 | RK 25 55° | 07252F | | for threads finer than 14 TPI or 1.75mm |
| 07260 | RK 26 60° | 07266C | | |
| 07260 | RK 26 60° | 07268F | | For threads finer than 14 TPI or 1.75mm |
| 07260 | RK 26 55° | 07265C | | Comply to British standard threads |
| 07260 | RK 26 55° | 07262F | | for threads finer than 14 TPI or 1.75mm |
| 07259 | N7250 Sleeve | 07259 | | Between 44 - 54mm (1 3/4" - 2 1/8") |
| 07269 | N7260 Sleeve | 07269 | | Between 54 - 68mm (2 1/8" - 2 5/8") |

Thread Restorer Product Line ®